




MP2600

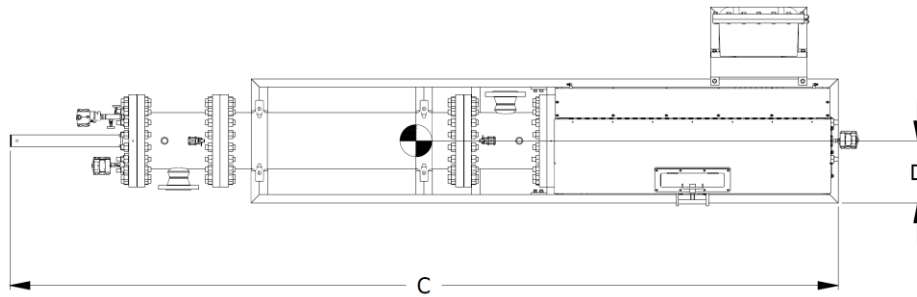


TOP VIEW



FRONT VIEW

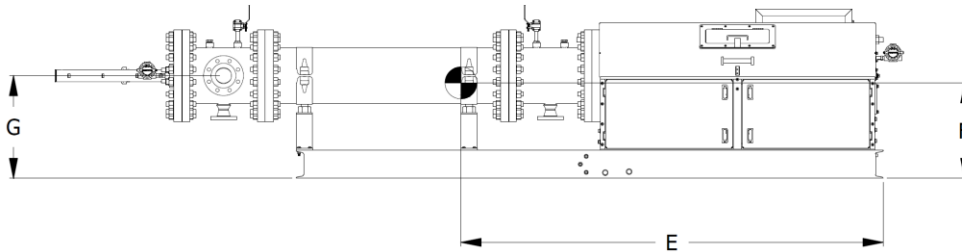

SIDE VIEW



BACK VIEW

Dimensions

Description	Model	ANSI B16.5 Flange Rating							
		Class 150		Class 300		Class 600		Class 900	
		cm	in	cm	in	cm	in	cm	in
Height	A	102	40	102	40	118	46.5	118	46.5
Width	B	124	49	124	49	124	49	124	49
Length	C	523	206	528	208	531	209	533	210
Width Center of Gravity	D	41	16	43	17	43	17	43	17
Length Center of Gravity	E	236	93	259	102	264	104	267	105
Height Center of Gravity (in)	F	58	23	61	24	79	31	79	31
Inlet & Outlet Height (in)	G	66	26	66	26	66	26	66	26
Inlet & Outlet Adjustable Angle	α	Adjustable To Meet Customer Requirements							

Weights

ANSI B16.5 Flange Rating	Weight (+/- 5%)		Weight Filled w/ Water (+/- 5%)	
	LBS	KGS	LBS	KG
Class 150	2863	1299	3313	1503
Class 300	3715	1685	4165	1889
Class 600	4636	2103	5086	2307
Class 900	6000	2722	6450	2926

Note:

- Dimensions "A", "B", "C" are for overall dimensions (+/- 1")
- Dimensions "D", "E", "F" are for center of gravity (+/- 6")
- All dimensions are subject to change without notice

Specifications

ANSI B16.5 Flange Rating	Max Working Pressure (PSI)	Max Flow Rate			Displaced Volume		I/O Size	Turndown
		GPM	BPH	M ³ H	Gallons	Liters		
Class 150	285	1820	2600	413	15	57	4"	1200:1
Class 300	740							
Class 600	1480							
Class 900	2220							

Note:

- Max working pressure is rated for a temperature range of -20°F (-30°C) to 250°F (120°C).
Per ASME/ANSI 31.4, para 404.4.1
- All pressure containing welds have been NDT tested per ASME/ANSI 31.3