




## MP2600

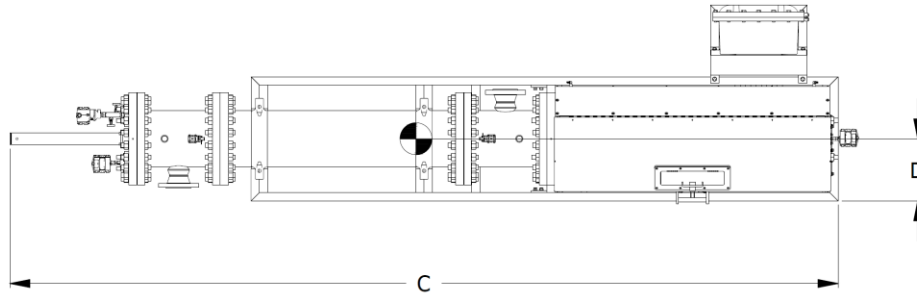


TOP VIEW



FRONT VIEW

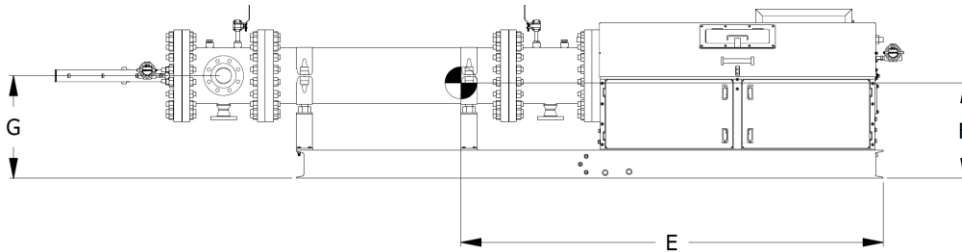

SIDE VIEW



BACK VIEW

### Dimensions

Description	Model	ANSI B16.5 Flange Rating							
		Class 150		Class 300		Class 600		Class 900	
		cm	in	cm	in	cm	in	cm	in
Height	A	102	40	102	40	118	46.5	118	46.5
Width	B	124	49	124	49	124	49	124	49
Length	C	523	206	528	208	531	209	533	210
Width Center of Gravity	D	41	16	43	17	43	17	43	17
Length Center of Gravity	E	236	93	259	102	264	104	267	105
Height Center of Gravity (in)	F	58	23	61	24	79	31	79	31
Inlet & Outlet Height (in)	G	66	26	66	26	66	26	66	26
Inlet & Outlet Adjustable Angle	$\alpha$	Adjustable To Meet Customer Requirements							

### Weights

ANSI B16.5 Flange Rating	Weight (+/- 5%)		Weight Filled w/ Water (+/- 5%)	
	LBS	KGS	LBS	KG
Class 150	2863	1299	3313	1503
Class 300	3715	1685	4165	1889
Class 600	4636	2103	5086	2307
Class 900	6000	2722	6450	2926

#### Note:

- Dimensions "A", "B", "C" are for overall dimensions (+/- 1")
- Dimensions "D", "E", "F" are for center of gravity (+/- 6")
- All dimensions are subject to change without notice

### Specifications

ANSI B16.5 Flange Rating	Max Working Pressure (PSI)	Max Flow Rate			Displaced Volume		I/O Size	Turndown
		GPM	BPH	M <sup>3</sup> H	Gallons	Liters		
Class 150	285							
Class 300	740							
Class 600	1480	1820	2600	413	15	57	6"	1200:1
Class 900	2220							

#### Note:

- Max working pressure is rated for a temperature range of -20°F (-30°C) to 250°F (120°C).  
Per ASME/ANSI 31.4, para 404.4.1
- All pressure containing welds have been NDT tested per ASME/ANSI 31.3